


|                        |                                                                                                                                                                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>23132179</b>                                                                                                                                                                                                                                                                 |
| article description    | <b>CEE-plug 32A 3p 6h IP67 SHARK</b>                                                                                                                                                                                                                                            |
| description long       | CEE-plug 32A 3p 6h IP67 SHARK<br>housing material: PA6<br>rated current: 32A<br>number of poles: 3 (2P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200-250V~ / 50+60Hz<br>contacts: brass<br>connection technology: screw terminals<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399136245                                                                                                                                                                                                                                                                   |
| country of origin      | AT                                                                                                                                                                                                                                                                              |
| customs number         | 85366990                                                                                                                                                                                                                                                                        |
| packaging quantity     | 10                                                                                                                                                                                                                                                                              |
| minimum order quantity | 10                                                                                                                                                                                                                                                                              |

|                            |                       |
|----------------------------|-----------------------|
| ETIM 7.0                   | EC000140              |
| IEC-amperage               | 32 A                  |
| Number of poles            | 3                     |
| Voltage acc. EN 60309-2    | 230 V (50+60 Hz) blue |
| Clock hour position        | 6 h                   |
| Identification colour      | Blue                  |
| Degree of protection (IP)  | IP67                  |
| Connection system          | Screwed terminal      |
| Cable entry                | Swivel                |
| Angle of plug              | Straight              |
| Material                   | Plastic               |
| Contact material           | CuZn                  |
| Surface treatment contacts | Untreated             |

|                    |                       |
|--------------------|-----------------------|
| a                  | 150 mm                |
| b                  | 93 mm                 |
| K (cable Ø)        | 11,5-20 mm            |
| SW                 | 50 mm                 |
| wire flexible      | 2,5-6 mm <sup>2</sup> |
| contact screws     | 110 Ncm               |
| strain relief      | 600 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 12-14 mm              |

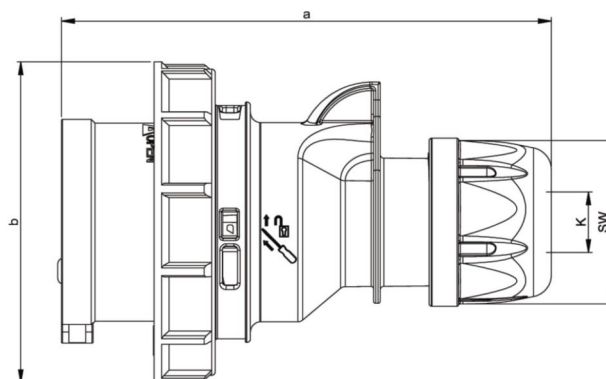

Descargá el catálogo