


|                     |                                                                                                                                                                                                                                                                                                                                                              |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#            | <b>23242274</b>                                                                                                                                                                                                                                                                                                                                              |
| article description | <b>CEE-wall mounted socket 32A 4p 3h IP67</b>                                                                                                                                                                                                                                                                                                                |
| description long    | CEE-wall mounted socket 32A 4p 3h IP67<br>housing material: PA6<br>rated current: 32A<br>number of poles: 4 (3P+PE)<br>clock-position: 3h<br>rated voltage/frequency: 380/440V~ / 50/60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>cable entry: top and rear<br>incl. threaded cable gland<br>IP protection class: IP67 |
| GTIN (EAN)          | 9003399146213                                                                                                                                                                                                                                                                                                                                                |
| country of origin   | AT                                                                                                                                                                                                                                                                                                                                                           |
| customs number      | 85366990                                                                                                                                                                                                                                                                                                                                                     |
| net weight          | 0.314 kg                                                                                                                                                                                                                                                                                                                                                     |
| packaging quantity  | 5                                                                                                                                                                                                                                                                                                                                                            |

|                           |                           |
|---------------------------|---------------------------|
| ETIM 7.0                  | EC001321                  |
| Model                     | Surface mounted (plaster) |
| IEC-amperage              | 32 A                      |
| Number of poles           | 4                         |
| Voltage acc. EN 60309-2   | 400-440 V (50+60 Hz) red  |
| Clock hour position       | 3 h                       |
| Identification colour     | Red                       |
| RAL-number                |                           |
| Degree of protection (IP) | IP67                      |
| Connection system         | Screw terminal            |
| Cable entry               | Swivel                    |
| Material                  | Plastic                   |
| Contact material          | CuZn                      |
| Surface finish contacts   | Nickel-plated             |
| Type of fastening         | External mounting         |

|                    |            |
|--------------------|------------|
| wire flexible      | 2,5-6 mm²  |
| wire solid         | 2,5-10 mm² |
| contact screws     | 110 Ncm    |
| dismantling length | 50 mm      |
| stripping length   | 12-14 mm   |

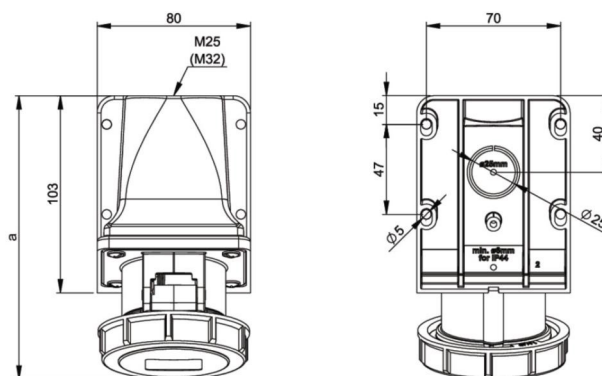

b=Höhe/height  
Neigung/angle=15°



Descargá el catálogo